



PERGO®

ORIGINAL LAMINATE


DALEN

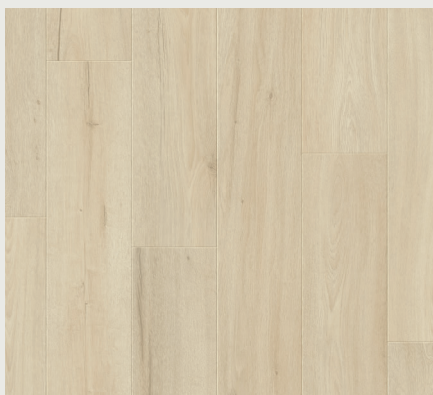

WHITE OAK

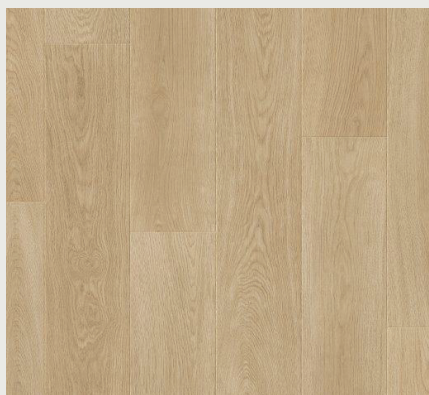

PURE OAK

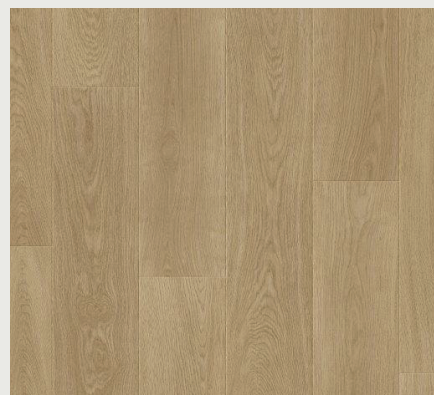


WYNN OAK




NOLA OAK




VIRGIN OAK

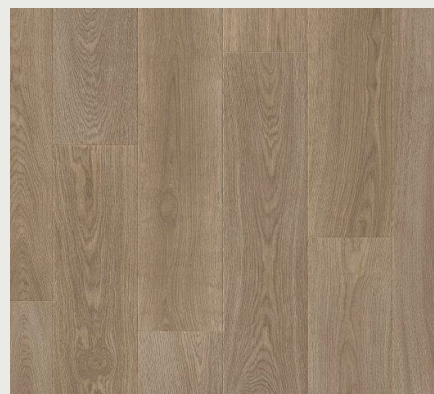

LIV OAK

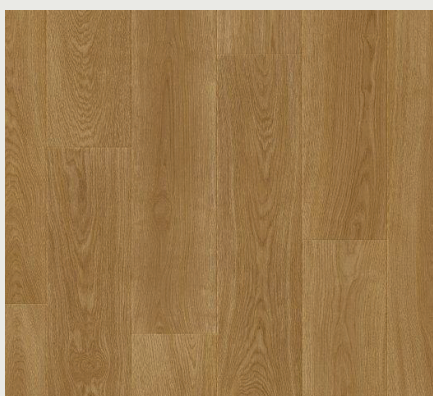


ZURI OAK

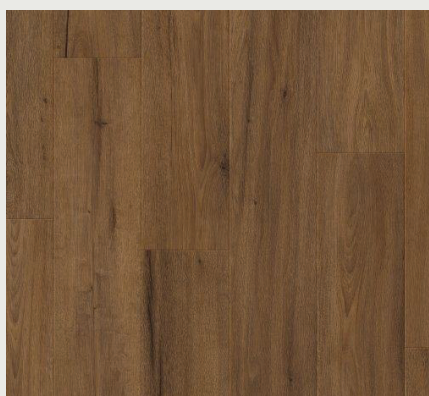

FERAL OAK

1261 x 192 x 8 mm | 4 WAY PRESSED BEVEL



Product characteristics

FORMAT	Length(mm)	Width(mm)	Thickness	Planks/box	Sqm/box	Boxes/pallet	Sqm/pallet	Kg/pallet
Dalen	1261	192	8	9	2,179 m2	52	113.31	± 815

General information

Bevels	with pressed in bevel all around
usage class	EN13329 - 32
CE	EN14041:2004 / AC: 2006 - DOP on pack
UKCA	EN14041:2004 / AC: 2006 - DOP on pack
Wear resistance	EN 13329 - ≥ 4 000 Cycles
Wear class	EN 13329 - AC4
Impact resistance	EN 13329 - ≥ 12 N
Scratch resistance	EN 438-2, 25 - Charge ≥ 5N
Effect of a castor chair	ISO 4918 (with underlay) - No charge
Thickness swelling	ISO 24336 - ≤ 12%
Locking strength Long side	ISO 24334 - ≥ 1 kN/m
Locking strength Short side	ISO 24334 - ≥ 2 kN/m
Effect of a furniture leg	EN 424 - No visible damage
Resistance to staining	EN 438 - Class 4/Class 5
Light fastness	EN ISO 4892 - Class 4
Formaldehyde emission	EN 717-1 - < 0,01
Anti-Static	EN 1815 - ≤ 2,0 kV
Reaction to fire	EN 13501-1 - Cfl-s1
Thermal resistance	EN 12667 - 0,055 m2K/W
Slip resistance	EN 13893 - DS: μ ≥ 0,30
Warranty residential use	20 years
Warranty Commercial use	10 years
Warranty Water resistance	10 years



ANTI-STATIC

CASTOR CHAIR

EASY INSTALLATION

EASIER CLEANING

HIGH FIRE RESISTANCE

BETTER ERGONOMICS

SCRATCH RESISTANCE

IMPACT RESISTANCE

SOUND RESISTANCE

WATER RESISTANCE

WEAR PROTECTION



EN14041:2018
Heterogeneous PVC
Floorcoverings ISO
10582:2018

EN15502:2007+A1:2011
Durable floorcoverings
ISO 10582:2018

