



FLOORPAN CLASSIC

FC062 - ATLAS

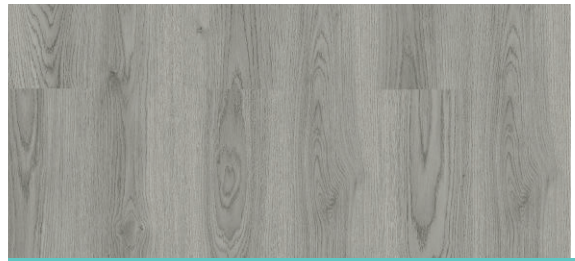

FLOORPAN CLASSIC

FC092 - GRISTA OAK

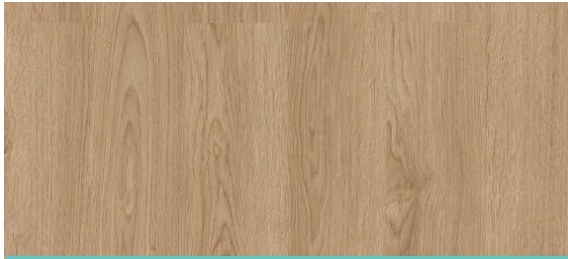

FLOORPAN CLASSIC

FC093 - SAVANI OAK



FLOORPAN CLASSIC

FC094 - SUNNY OAK




FLOORPAN CLASSIC

006 - STORK



FLOORPAN CLASSIC

009 - LEFKAS

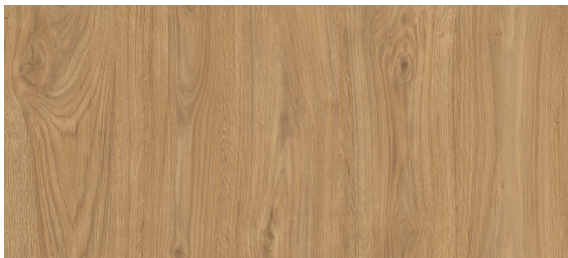

FLOORPAN CLASSIC

052 - LIMA

15 YEARS
DOMESTIC USE
GUARANTEE



AC4

10 YEARS
COMMERCIAL USE
GUARANTEE



CLASSIC
SPEC SHEET

THICKNESS	mm	8	EN 13329 + A1
WIDTH	mm	249	EN 13329 + A1
LENGTH	mm	1205	EN 13329 + A1
SURFACE		Timberland	
EUROPEAN STANDARD	-	15 YEARS WARRANTY GUARANTEE F11 F12 F13 F14 F15 F16 F17 F18 F19 F20 F21 F22 F23 F24 F25 F26 F27 F28 F29 F30 F31 F32 F33 F34 F35 F36 F37 F38 F39 F40 F41 F42 F43 F44 F45 F46 F47 F48 F49 F50 F51 F52 F53 F54 F55 F56 F57 F58 F59 F60 F61 F62 F63 F64 F65 F66 F67 F68 F69 F70 F71 F72 F73 F74 F75 F76 F77 F78 F79 F80 F81 F82 F83 F84 F85 F86 F87 F88 F89 F90 F91 F92 F93 F94 F95 F96 F97 F98 F99 F100 AC4	EN 13329

PACKAGE DETAILS			
PIECE		8 piece / 1 package	
M2		2,40 m2	
KG		17.5 kg	

PALLET DETAILS			
PIECE		45 boxes / 1 pallet	
M2		108 m2	
KG		787.5 kg	

CLASS		-	32	EN 13329+A1
ABRASION RESISTANCE		-	AC4	EN 13329+A1
THICKNESS SWELLING		%	≤18	ISO 24336
RESISTANCE TO IMPACT	SMALL BALL	N	≥8	EN 13329+A1
	LARGE BALL	mm	≥500	
WARRANTY DOMESTIC / COMMERCIAL		Years	10/5	-
RESISTANCE TO STAINING		-	Min. 5 (group 1 and 2) Min. 4 (group 3)	EN 438-2_5
SURFACE SOUNDNESS		N/mm²	≥1.0	EN 13329+A1
LOCK STRENGTH	LENGTH	kN/m	-	ISO 24334
	WIDTH	kN/m	-	
EFFECT OF CASTOR CHAIR		"25.000 Cycles"	No Damage	EN 425:2002b
EFFECT OF A FURNITURE LEG		-	No damage shall be visible when tested with foot type 0	EN 424
OPENING BETWEEN ELEMENTS. (0)		mm	"0 average ≤ 0,15 mm 0 max. ≤ 0,20 mm"	EN 13329+A1
HEIGHT DIFFERENCE BETWEEN ELEMENTS (H)		mm	h average ≤ 0,10 mm h max. ≤ 0,15 mm	EN 13329+A1
MOISTURE CONTENT		%	4-10	EN 322
FIRE RESISTANCE		Class	CflS1	EN 9239-1
FORMALDEHYDE RELEASE		mg/m²h	≤3,5 (E1)	EN 12460-3

